

Produktdatenblatt

Higo - F618A


Male cable connector



Push-on flexible

F618AG P 00 GN 1000

<https://higoconnector.digitaledoeners.be/de/e-bike-steckverbinder/f618agp00gn1000>

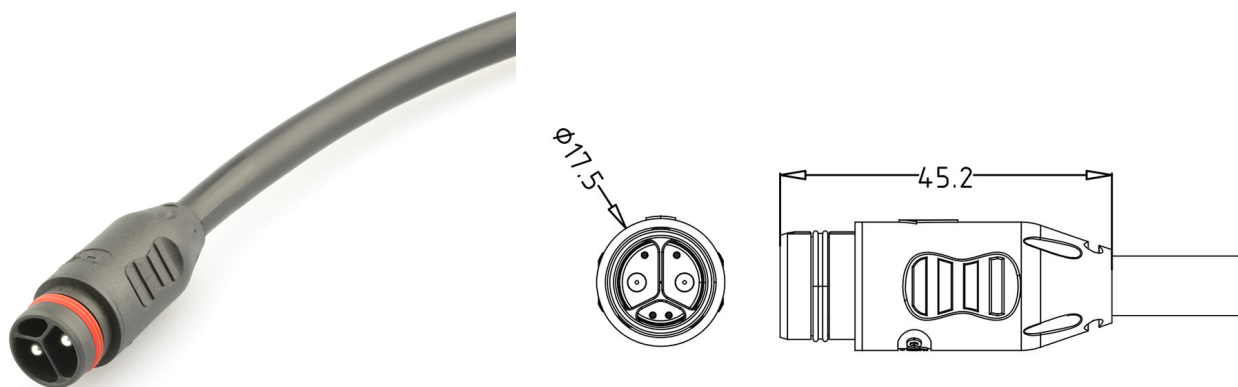

Spezifikationen

Electrical Parameters

x_max_contact_resistance	?10
x_max_insulation_resistance	?20
x Rated current	30 / 2 A
x Rated voltage	48 V AC / 60 V DC

General Characteristics

x_cable_diameter	8 mm
x_cable_length	1000 mm
x_color	Black
x_connector_diameter	18,0 mm
x_connector_shape_detail	Plug
x_fitting_length	40 mm
x_gender_detailed	Male
x_lower_temperature	-25 °C
x_mating_cycles	3000 Times
x_number_of_contacts_detailed	6 (2+4)

Produktdatenblatt

Higo - F618A

Male cable connector



x_protection_degree	IP67
x_remark	Other cable length/type on request
x_upper_temperature	80 °C
x_wire_section	2 x 3,3 + 4 x 0,2

Produktdatenblatt

Higo - F618A

Male cable connector



Material

x_contact_plating	Silver plated
x_insulation_wire	FEP
x_material_jacket	PVC
x_material_of_contact	Copper alloy