

# Produktdatenblatt


## Higo - Micro X

### Micro X male cable connector



Z305XG P 00 FG 1000

<https://higoconnector.digitaledoeners.be/de/e-bike-steckverbinder/z305xgp00fg1000>

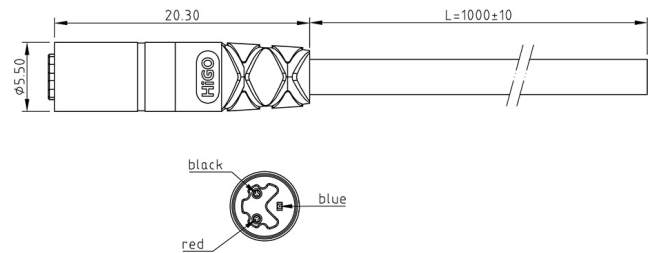

## Spezifikationen

### Electrical Parameters

x_max_contact_resistance	?10
x_max_insulation_resistance	?20
x Rated current	2 A
x Rated voltage	48 V AC / 60 V DC

### General Characteristics

x_cable_diameter	2.8 mm
x_cable_length	1000 mm
x_color	Yellow
x_connector_diameter	5.5 mm
x_connector_shape_detail	Plug
x_fitting_length	36 mm
x_gender_detailed	Male
x_lower_temperature	-25 °C
x_mating_cycles	200 Times
x_number_of_contacts_detailed	3
x_protection_degree	IP67
x_remark	Other cable length/type on request

# Produktdatenblatt

## Higo - Micro X

Micro X male cable connector



x_terminal_type_detailed	IP67
x_upper_temperature	80 °C
x_wire_section	3 x 0,14 mm <sup>2</sup>

# Produktdatenblatt

## Higo - Micro X

Micro X male cable connector



### Material

x_contact_plating	Gold over Nickel
x_insulation_wire	FEP
x_material_jacket	PVC
x_material_of_contact	Copper Alloy