

# Product data sheet

## Higo - S824A



Female panel mount connector, self-locking



### Self-locking, button release

S824AM C 03 FQ 0300

<https://higoconnector.digitaledoeners.be/en/e-bike-connector/s824amc03fq0300>

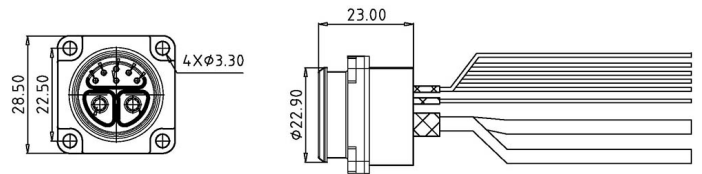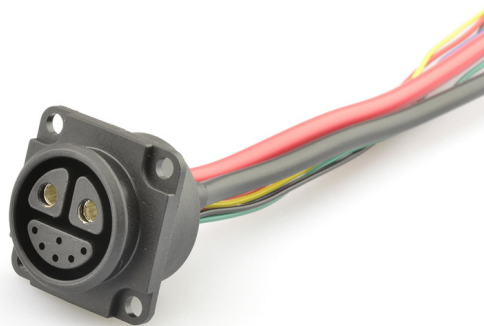

## Specifications

### Electrical Parameters

Max. contact resistance	?10 m?
Max. insulation resistance	?20 M?
Rated current	70 / 2 A
Rated voltage	48 V AC / 60 V DC

### General Characteristics

Cable Length	300 mm
Color	Black
Connector diameter	22.9 mm
Connector shape	Panel mount
Gender	Female
IP Protection	IP67
Lower temperature	-25 °C
Mating cycles	3000 Times
Number of contacts	8 (2+6)
Remark	Other cable length/type on request

# Product data sheet

## Higo - S824A

Female panel mount connector, self-locking



Upper temperature	80 °C
Wire section	2 x 10,0 + 6 x 0,20

# Product data sheet

## Higo - S824A

Female panel mount connector, self-locking



### Material

Contact plating	Gold over Nickel
Insulation wire	PVC
Material of contact	Brass