

# Product data sheet

## Higo - Mini F



Mini F female panel mount connector



### Straight PCB contacts

Z209FM C 04 00 0000

<https://higoconnector.digitaledoeners.be/en/e-bike-connector/z209fmc04000000>

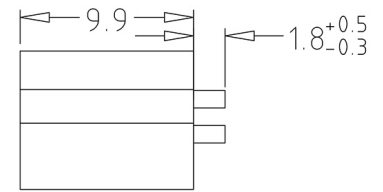

## Specifications

### Electrical Parameters

Max. contact resistance	?10 m?
Max. insulation resistance	?20 M?
Rated current	2 A
Rated voltage	48 V AC / 60 V DC

### General Characteristics

Color	Red
Connector diameter	7,9 x 6,3 mm
Connector shape	Panel mount
Gender	Female
IP Protection	IP66/IP67
Lower temperature	-25 °C
Mating cycles	200 Times
Number of contacts	2
Remark	Other cable length/type on request
Terminal type	Straight PCB contacts

# Product data sheet

## Higo - Mini F

Mini F female panel mount connector



Upper temperature

80 °C

# Product data sheet

## Higo - Mini F

Mini F female panel mount connector



### Material

Contact plating	Gold over Nickel
Material of contact	Copper Alloy